

GPM | Gentile Packaging Machinery

gentilemachinery.com • info@gentilemachinery.com • 734.429.1177

GPM Variable Speed Bellows Filler

The Gentile Packaging Machinery Variable Speed Bellows Filler is an easy to use tabletop filler that uses a bellows metering pump for product fills up to 55ml. The fill volume is easily adjusted by hand and is accurate and consistent. The GPM Variable Speed Bellows Filler comes with an adjustable bracket and V style bottle guide to accommodate various bottle sizes and styles. A hoses attachment also allows for filling by hand into virtually any type of container desired. This filler is very easy to set up, clean, and change over, and requires no special tools. Product cycle is initiated by pressing a foot pedal. The GPM Variable Speed Bellows Filler can cycle up to 38 cycles per minute. Normal operating speed is between 20-25 bottles per minute, depending on the product, fill volume, and operator speed.

Product Specifications

Weight: Approximately 17 pounds

Power Requirements: 120V

Max Speed: up to 38 cycles per minute

Normal Operating Speed: 20-25 bottles per minute

Product Fills: 0.5ml - 55ml

Bellows Sizes: 0.5ml - 5ml, 2ml - 10ml or 11ml - 55ml

Accuracy: Repeatable to +/- 1.5%

Maximum Product Viscosity: 5,000 centistokes

Maximum Product Temperature: 140°F

Nozzle: Stainless Steel


Tubing: Reinforced Tygon

Bellows: Polypropylene

Available Options

Multiple Head Fillers for Automatic Systems

Luer Lock Nozzle Attachments

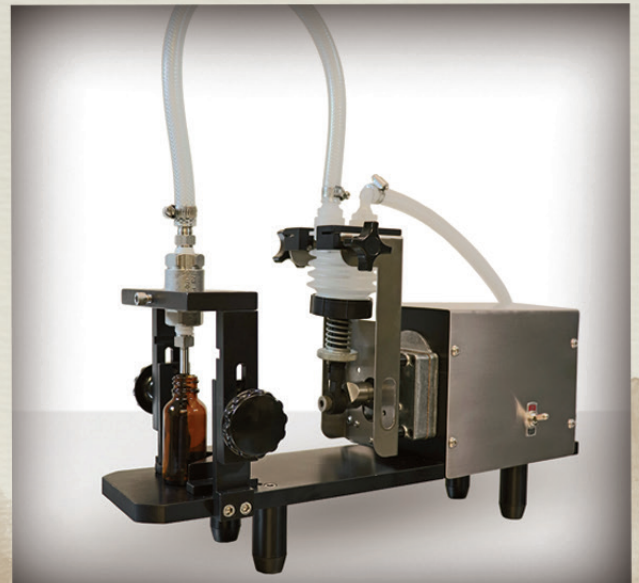

*Built tough in the USA
since 1967.*



*Adjustments for nozzle height
and fill volume are easy and
require no tools!*